


特長

- 與本公司原先的HCE系列相比體積縮小了30%
- 薄膜外殼設計提高了絕緣耐壓性能（端子-外殼間），安全性提高了。


用途

- 應對電氣機器、變頻式家電製品的電源高頻。

電路圖

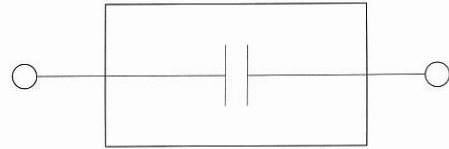


外形尺寸

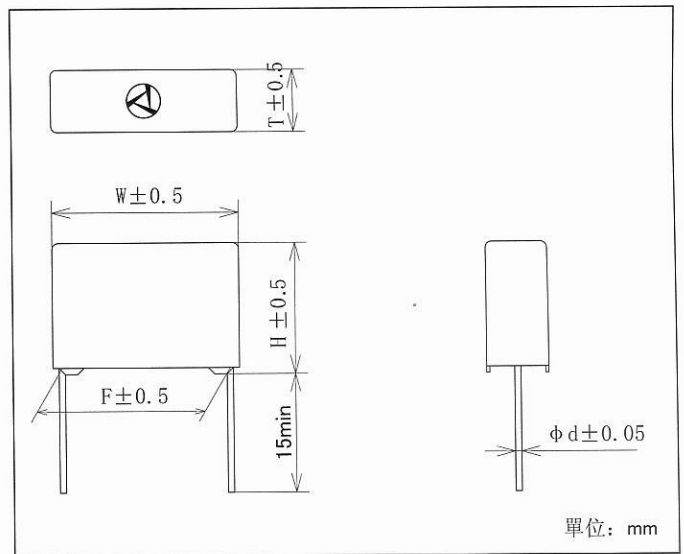

單位：mm

單位：mm

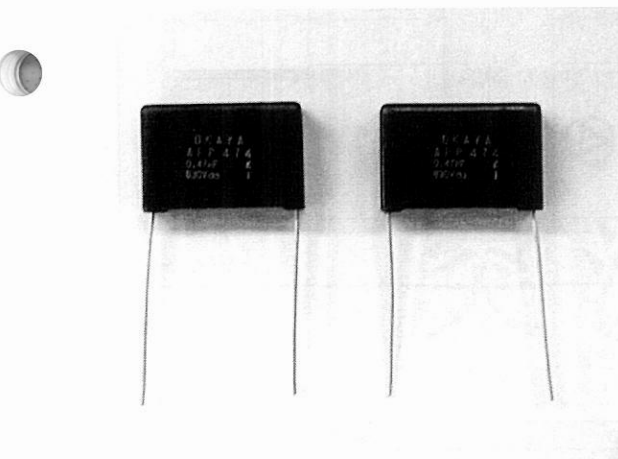

靜電容量	V	450V					630V					介質損耗角 正切	試驗電壓	絕緣電阻
		PART NO.	μF	W	H	T	F	d	W	H	T			
104	0.1	12.0	11.5	6.5	10.0	0.6	17.0	12.0	6.0	15.0	0.6	C ≤ 1.0 μF 0.001max C > 1.0 μF 0.002max (at 1000 ±100Hz)	額定電壓 ×1.75 (2~5sec)	C ≤ 0.33 μF 50000Ω·min C > 0.33 μF 20000Ω·Fmin (at 20°C 100VDC)
154	0.15	14.0	11.5	7.0	12.5	"	"	15.0	8.0	"	"			
224	0.22	"	13.5	8.0	"	"	"	16.0	9.0	"	"			
334	0.33	"	15.5	10.0	"	"	25.5	17.5	8.0	22.5	0.8			
474	0.47	17.0	16.5	11.5	15.0	"	"	19.0	9.5	"	"			
684	0.68	22.5	17.0	10.0	20.0	"	30.5	21.0	10.5	27.5	"			
105	1.0	"	20.5	12.0	"	"	"	23.0	12.5	"	"			
155	1.5	26.0	22.0	13.5	22.5	0.8	"	27.5	17.0	"	"			
225	2.2	"	25.0	17.0	"	"	"	30.5	20.5	"	"			

使用溫度範圍：-40°C ~ +100°C

品名命名方法

