

THREE-PHASE NOISE FILTER

3SUPF-CH (80~300) SERIES



Features

- Low profile
- Three-phase filter delta (500Vac)
- Type of inductance coil is ferrite
- The capacitance of Y cap is selectable

Applications

• Inverter power supplies, UPS, NC controlled machineries




	Safety Standard	File No.		
UL	:UL-1283	E78644		
cUL	:CSA C22.2 No.8	□10044		
ENEC	:EN60939-3	SE-ENEC-2201018R1		


The "ENEC" mark is a common European product certification mark based on

testing to harmonised European safety standard.
*File No. may be revised without notice. Please contact us at the time of your request for certifications.

• Circuit




Dimensions

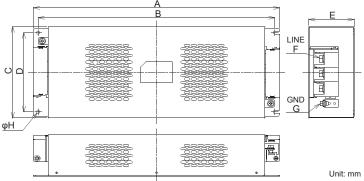

Mandal Novelean	Dimensions (mm)							
Model Number	Α	В	O	D	Е	F	G	Η
3SUPF-CH80M-F	435	419	160	135	85	M8	M6	6.5
3SUPF-CH100M-F	433							
3SUPF-CH150M-F	468	450	190		86			
3SUPF-CH200M-F		563	195	165	102	M10	M8	
3SUPF-CH250M-F	583							
3SUPF-CH300M-F								

• Static characteristics (Representative example)



Electrical Specifications

Rated Voltage 500Vac

	g										
Safety Standard	Model Number*1	Rated Current (A)	Test Voltage *2	Insulation Resistance	Leakage Current *3 max.	Voltage Drop max.	Temperature Rise max.	Operating Temperature (°C)	Weight typ.(kg)		
	3SUPF-CH80M-F	80	Line to Case 2,500Vac 50/60Hz 60sec	Vac 100MΩmin	5.5mA (at 500Vac 60Hz)	1.0Vac	60K	-25 ~ +50 (Derating of current from 50 to 85°C)	8.0		
	3SUPF-CH100M-F	100							7.7		
c FN °us	3SUPF-CH150M-F	150							11.5		
14 <u>S</u>	3SUPF-CH200M-F	200							15.0		
intertek i	3SUPF-CH250M-F	250							15.2		
	3SUPF-CH300M-F	300							14.2		

^{*1} Standard type *2 Leakage current of Standard type *3 Leakage current of standard type