




**Features**


- Compact size and resin case.
- Best for high frequency and high current.

**Applications**



- High frequency circuit, High voltage resonant circuit, Snubber circuit and Protection of semiconductors such as IGBT, IPM and MOSFET.
- Model numbering system

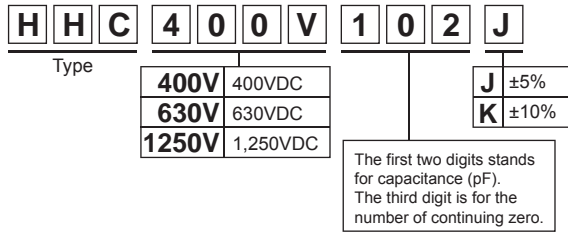

**Circuit**



**Dimensions**

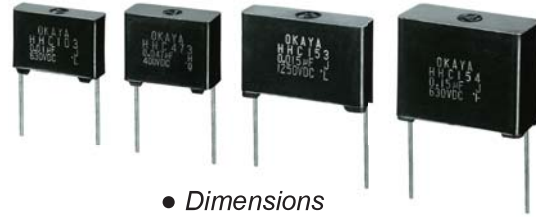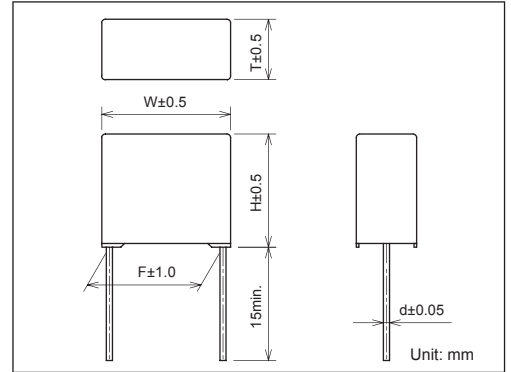

**Electrical Specifications**

Rated Voltage	Model Number	Capacitance μF±10%	Dimensions (mm)					Dissipation Factor	Test Voltage	Insulation Resistance
			W	H	T	F	d			
400VDC	HHC400V333□	0.033	17.0	12.0	5.0	5.0	0.8	0.001max. (at 1k±100Hz)	Rated Voltage ×1.75VDC (2~5sec)	50,000MΩmin. (at 20°C, 100VDC)
	HHC400V393□	0.039	17.0	13.5	6.5	6.5	0.8			
	HHC400V473□	0.047	17.0	13.5	6.5	6.5	0.8			
	HHC400V563□	0.056	17.0	15.0	8.0	8.0	0.8			
	HHC400V683□	0.068	17.0	15.0	8.0	8.0	0.8			
	HHC400V823□	0.082	25.0	16.0	6.5	6.5	0.8			
	HHC400V104□	0.1	25.0	16.0	6.5	6.5	0.8			
	HHC400V124□	0.12	25.0	17.5	8.0	8.0	0.8			
	HHC400V154□	0.15	25.0	17.5	8.0	8.0	0.8			
	HHC400V184□	0.18	25.0	19.5	10.0	10.0	0.8			
HHC400V224□	0.22	25.0	19.5	10.0	10.0	0.8				
630VDC	HHC630V103□	0.01	17.0	12.0	5.0	5.0	0.8			
	HHC630V123□	0.012	17.0	12.5	5.5	5.5	0.8			
	HHC630V153□	0.015	17.0	12.5	5.5	5.5	0.8			
	HHC630V183□	0.018	17.0	12.5	5.5	5.5	0.8			
	HHC630V223□	0.022	17.0	12.5	5.5	5.5	0.8			
	HHC630V273□	0.027	17.0	13.5	6.5	6.5	0.8			
	HHC630V333□	0.033	17.0	15.0	8.0	8.0	0.8			
	HHC630V393□	0.039	17.0	15.0	8.0	8.0	0.8			
	HHC630V473□	0.047	17.0	15.0	8.0	8.0	0.8			
	HHC630V563□	0.056	25.0	16.0	6.5	6.5	0.8			
	HHC630V683□	0.068	25.0	16.0	6.5	6.5	0.8			
	HHC630V823□	0.082	25.0	17.5	8.0	8.0	0.8			
	HHC630V104□	0.1	25.0	17.5	8.0	8.0	0.8			
	HHC630V124□	0.12	25.0	19.5	10.0	10.0	0.8			
HHC630V154□	0.15	25.0	19.5	10.0	10.0	0.8				
HHC630V184□	0.18	25.0	19.5	10.0	10.0	0.8				
1250VDC	HHC1250V224□	0.22	25.0	19.5	10.0	10.0	0.8			
	HHC1250V102□	0.001	17.0	12.0	5.0	5.0	0.8			
	HHC1250V122□	0.0012	17.0	12.0	5.0	5.0	0.8			
	HHC1250V152□	0.0015	17.0	12.0	5.0	5.0	0.8			
	HHC1250V182□	0.0018	17.0	12.0	5.0	5.0	0.8			
	HHC1250V222□	0.0022	17.0	12.0	5.0	5.0	0.8			
	HHC1250V272□	0.0027	17.0	12.5	5.5	5.5	0.8			
HHC1250V332□	0.0033	17.0	12.5	5.5	5.5	0.8				

□:J=Tolerance of Capacitance ±5%, K=Tolerance of Capacitance ±10%

Operating Temperature: -40~+105°C



**Electrical Specifications**

Rated Voltage	Model Number	Capacitance $\mu\text{F} \pm 10\%$	Dimensions (mm)					Dissipation Factor	Test Voltage	Insulation Resistance
			W	H	T	F	d			
1250VDC	HHC1250V392□	0.0039	12.5	5.5	15.0	15.0	0.8	0.001max. (at 1k±100Hz)	Rated Voltage ×1.75VDC (2~5sec)	50,000MΩmin. (at 20°C, 100VDC)
	HHC1250V472□	0.0047	12.5	5.5	15.0	15.0	0.8			
	HHC1250V562□	0.0056	13.5	6.5	15.0	15.0	0.8			
	HHC1250V682□	0.0068	13.5	6.5	15.0	15.0	0.8			
	HHC1250V822□	0.0082	15.0	8.0	15.0	15.0	0.8			
	HHC1250V103□	0.01	15.0	8.0	15.0	15.0	0.8			
	HHC1250V123□	0.012	16.0	6.5	22.5	22.5	0.8			
	HHC1250V153□	0.015	16.0	6.5	22.5	22.5	0.8			
	HHC1250V183□	0.018	17.5	8.0	22.5	22.5	0.8			
	HHC1250V223□	0.022	17.5	8.0	22.5	22.5	0.8			
HHC1250V273□	0.027	19.5	10.0	22.5	22.5	0.8				
HHC1250V333□	0.033	19.5	10.0	22.5	22.5	0.8				

□:J=Tolerance of Capacitance ±5%, K=Tolerance of Capacitance ±10%

Operating Temperature: -40~+105°C

● Permissible current data (r.m.s. value)

