



ノイズサプレッションキャパシタ

VEA SERIES

NOISE SUPPRESSION CAPACITOR



特長


●大容量で、300V定格の小型シリーズです。

用途


●3相Y結線500V機器のノイズ対策用。




安全規格		File No.
UL	:UL-1283	E78644
c-UL	:C22.2 No.8	E78644
SEMKO	:IEC/EN 60384-14: 2005	712459

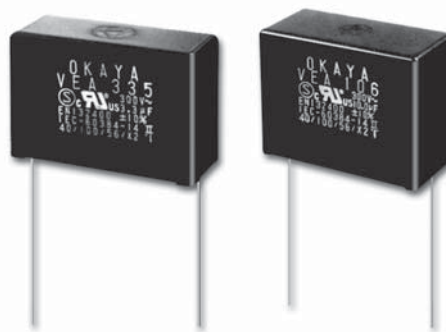

外形寸法

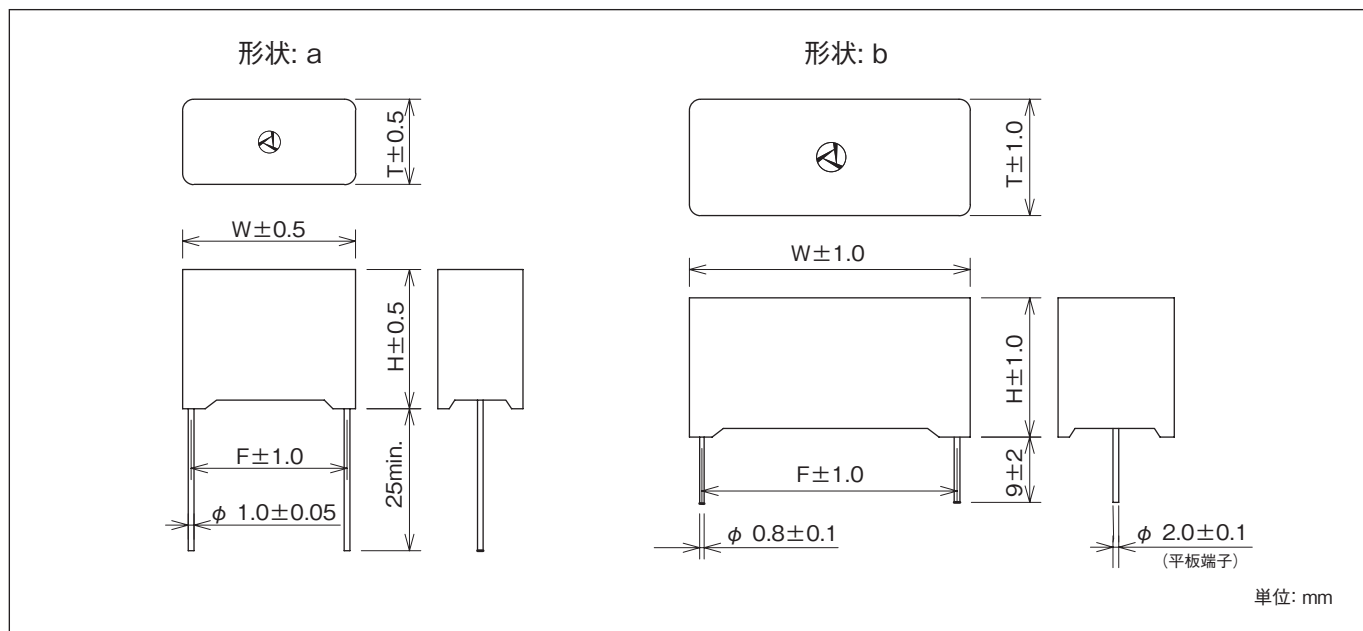

回路図



型名構成



定格電圧 **300VAC**

安全規格	クラス	型名	静電容量 μF±10%	外形寸法(mm)				形状	誘電正接	試験電圧	絶縁抵抗
				W	H	T	F				
	X2	VEA105K	1.0	30.5	24.5	15.0	27.5	a	0.001max. (at 1kHz)	端子間 1,450VDC 60sec. もしくは 1,000VAC 60sec.	端子間 5,000Ω・Fmin.
		VEA155K	1.5	41.0	28.0	15.5	37.5				
		VEA225K	2.2		32.5	17.5					
		VEA305K	3.0	49.5	33.0	20.5	45.0	b	0.002max. (at 1kHz)	端子・ケース間 2,100VAC 50/60Hz 60sec.	端子・ケース間 30,000MΩmin. (at 500VDC)
		VEA335K	3.3								
		VEA475K	4.7	59.5	35.5	21.5	55.0				
		VEA685K	6.8		43.5	30.5					
		VEA106K	10.0								

使用温度範囲: -40~+100°C