



**Features**

- Applies to American, Canadian and German applications.

**Applications**

- Suppressing noise occuring Automatic machines and Office appliances.



Safety Agency : Standard		File No.
UL	: UL-1414	E47474
CSA	: CSA C22.2 No.0, No.1	LR37404/LR68886
VDE	: IEC60384-14 II, EN132400	128473 (XA Series)





XA Series



XAB Series

*Dimensions*

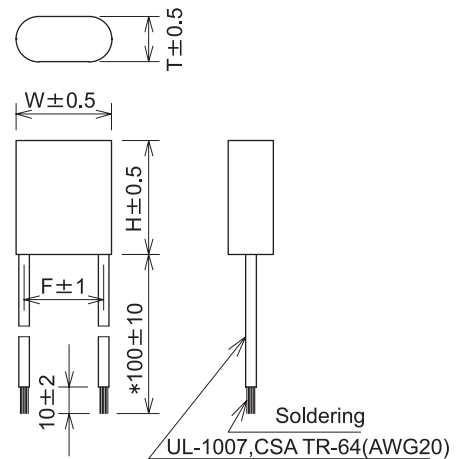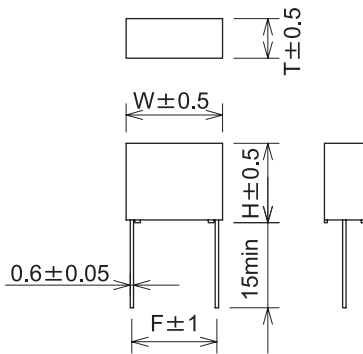

*Circuit*



\*200 & 300 available

Unit: mm

**Electrical Specifications**

Rated Voltage **125VAC(UL, CSA), 250VAC(VDE)**

Safety Agency	Class	Model Number	Capacitance $\mu F \pm 20\%$	Resistance $\Omega \pm 30\%$	Dimension				Pulse condition (Max.)				Peak Pulse Voltage	Test Voltage	Insulation Resistance
					W	H	T	F	Peak to peak	Pulse width Max.	Repetitive frequency	Pulse width (sec) x Frequency (Hz)			
	X 2	XA120033	0.033	120(1/4W)	17.0	14.0	7.0	15.0	700V max	20msec.	120(60)Hzmax	3(0.8)max	700V	Line to Line 1200Vrms 50/60Hz 2~5sec Line to Case 2000Vrms 50/60Hz 60sec	Line to Line 15,000M $\Omega$ min Line to Case 100,000M $\Omega$ min (at 500VDC)
		XA1201	0.1		20.0	16.5	17.5								
		XAB1201	0.1	120(1/2W)	18.0	21.5	8.5	15.0	700V max	50msec.	120Hz max	3max	700V	Line to Line 1200Vrms 50/60Hz 2~5sec Line to Case 2000Vrms 50/60Hz 60sec	Line to Line 15,000M $\Omega$ min Line to Case 100,000M $\Omega$ min (at 500VDC)
		XAB1202	0.2		19.0	23.0									

Operating Temperature: -40~+85°C