



Features

- Rated voltage 250Vac, compact size.

Applications

- Suppressing mechanical occurring switching surge Automatic machines and Office appliances.

Circuit





Dimensions

Type: a

Type: b

Type: c

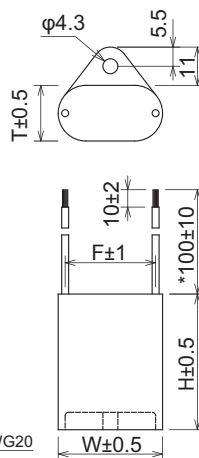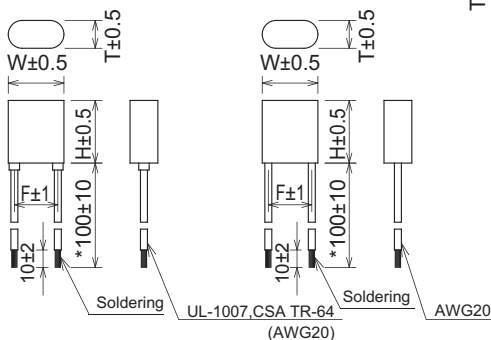

*200±20, 300±30 available

Unit: mm



Model numbering system

| X | E | B | Resistance | | Capacitance | |
|-------------|------|-----|------------|--|-------------|--|
| Series Name | | | | | | |
| 010 | 10Ω | 01 | 0.01μF | | | |
| 047 | 47Ω | 033 | 0.033μF | | | |
| 120 | 120Ω | 1 | 0.1μF | | | |
| 220 | 220Ω | 2 | 0.2μF | | | |
| 470 | 470Ω | 3 | 0.3μF | | | |
| | | 5 | 0.5μF | | | |
| | | 10 | 1.0μF | | | |

The combination of Resistance and Capacitance is shown in following chart.

Electrical Specifications

Rated Voltage **250Vac**

| Safety Standard | Class | Model Number | Capacitance μF±20% | Resistance Ω±30% | Type | Dimensions | | | | Pulse condition (max.) | | | | Peak Pulse Voltage | Test Voltage | Insulation Resistance | | | | | | |
|-----------------|---------|--------------|--------------------|------------------|------|------------|------|------|------|------------------------|-------------|----------------------|-----------------------------------|-------------------------------------|--|-----------------------|------|------|------|------|-------------------------------------|---|
| | | | | | | W | H | T | F | Peak to peak | Pulse width | Repetitive frequency | Pulse width (sec) x Frequency(Hz) | | | | | | | | | |
| | X2 | XEB01001 | 0.01 | 10(1/4W) | a | 16.0 | 18.0 | 8.0 | 12.5 | 800V | 50msec | 120Hz | 1,200V max. | Line to Line 1,250Vac 50/60Hz 60sec | Line to Line 15×10 ³ MΩ min. except: XEB0105 0475,01010 5,000MΩ min. (500Vdc) | | | | | | | |
| | | XEB04701 | | 47(1/4W) | | | | | | | | | | | | | | | | | | |
| | | XEB12001 | | 120(1/4W) | | | | | | | | | | | | | | | | | | |
| | | XEB22001 | | 220(1/4W) | | | | | | | | | | | | | | | | | | |
| | | XEB47001 | | 470(1/4W) | | | | | | | | | | | | | | | | | | |
| | | XEB010033 | | 10(1/4W) | | | | | | | | | | | | | | | | | | |
| | | XEB047033 | 47(1/4W) | | | | | | | | | | | | | | | | | | | |
| | | XEB120033 | 120(1/4W) | | | | | | | | | | | | | | | | | | | |
| | | XEB220033 | 220(1/4W) | | | | | | | | | | | | | | | | | | | |
| | | XEB470033 | 470(1/4W) | | | | | | | | | | | | | | | | | | | |
| | | XEB0101 | 10(1/2W) | 0.1 | b | 21.5 | 28.0 | 11.0 | 17.0 | | | | | | | 30.0 | 39.0 | 16.0 | 26.0 | 0.25 | Line to Case 2,000Vac 50/60Hz 60sec | Line to Case 1×10 ⁵ MΩ min. (500Vdc) |
| | | XEB0471 | 47(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB1201 | 120(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB2201 | 220(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB4701 | 470(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB0102 | 10(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB0472 | 47(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB1202 | 120(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB2202 | 220(1/2W) | | | | | | | | | | | | | | | | | | | |
| | | XEB0103 | 10(1W) | 0.2 | c | 37.0 | 48.0 | 22.0 | 33.0 | | | | | | | 0.08 | 0.2 | 0.1 | 0.05 | 0.02 | 0.18 | 0.05 |
| XEB0473 | 47(1W) | | | | | | | | | | | | | | | | | | | | | |
| XEB1203 | 120(1W) | | | | | | | | | | | | | | | | | | | | | |
| XEB2203 | 220(1W) | | | | | | | | | | | | | | | | | | | | | |
| XEB0105 | 10(1W) | | | | | | | | | | | | | | | | | | | | | |
| XEB0475 | 47(1W) | | | | | | | | | | | | | | | | | | | | | |
| XEB01010 | 10(1W) | | | | | | | | | | | | | | | | | | | | | |

Operating Temperature: -40~+100°C