



Features

- X2 class capacitor RE series with insulated flexible wire leads
- UL, CSA (cUL), IEC/EN 60384-14 (class X2)




Safety Standard	File No.
UL :UL60384-14	E236227
cUL :CSA E60384-14	E236227
ENEC/SEMKO :IEC/EN 60384-14	SE-ENEC-2100337R1

The "ENEC" mark is a common European product certification mark based on testing to harmonised European safety standard. The mark with #14 stands for SEMKO.
* File No. may be revised without notice. Please contact us at the time of your request for certifications.




Applications

- Industrial machinery, electric appliances and lighting

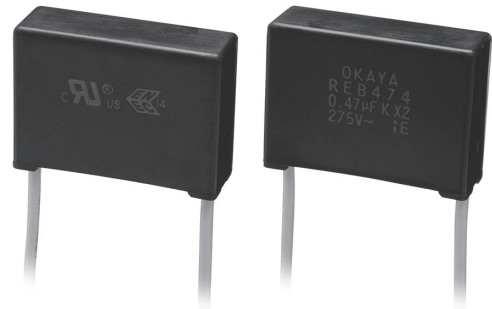

Dimensions

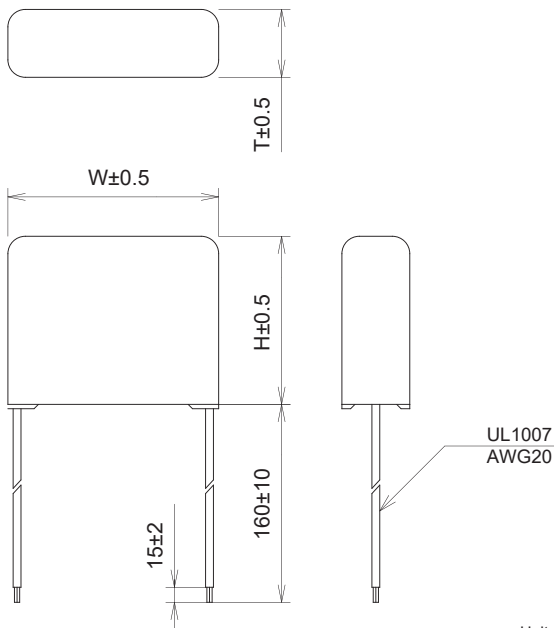


Unit: mm

Circuit



Model numbering system



Electrical Specifications

Rated Voltage **275Vac**

Safety Standard	Class	Model Number	Capacitance $\mu\text{F} \pm 10\%$	Dimensions			Dissipation Factor	Test Voltage	Insulation Resistance		
				W	H	T					
	X2	REB473	0.047	17.0	12.5	5.5	0.003max. (at 10kHz)	Line to Line 1,250Vac 50/60Hz 60sec Line to Case 2,000Vac 50/60Hz 60sec	Line to Line $C \leq 0.33 \mu\text{F}$ 15,000M Ω min. (at 100Vdc) Line to Case $C = 0.47 \mu\text{F}$ 5,000 $\Omega \cdot \text{F}$ min. (at 100Vdc)		
		REB683	0.068		13.5	6.5					
		REB104	0.1		15.0	8.0					
		REB154	0.15	20.0	17.5	8.5					
		REB224	0.22								
		REB334	0.33	27.0	18.0	8.0					
		REB474	0.47							19.5	9.5
		REB684	0.68							21.5	10.5
		REB105	1.0	32.0	23.5	12.5					

Operating Temperature: -40~+100°C