



Features

- Designed for 100Vac line
- Compact shape for general purpose use



Applications

- Suppressing noise occurring in automatic machines, office appliances and power source

Model numbering system

Series Name	Resistance	Capacitance
S	Bare wire	033 0.033μF
SB	Flex PVC wire	1 0.1μF
		2 0.2μF
		3 0.3μF
		5 0.5μF


Circuit

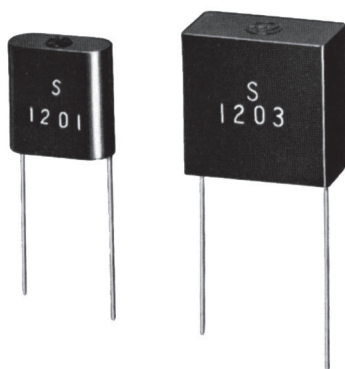


Dimensions

S series (Bare wire)


S1202~S1205



S120033, S1201

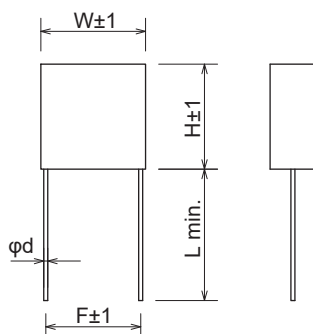

SB series (Flex PVC wire)

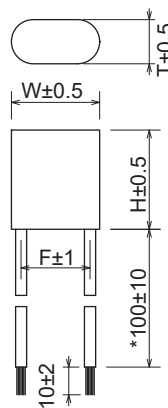

*200, 300 available



Soldering

UL-1007, CSA TR-64 approval standard (AWG20)

Unit: mm

Electrical Specifications

Rated Voltage **150Vac**

Model number	Capacitance μF±20%	Resistance Ω±30%	Dimensions (mm)						Pulse condition (max.)				Peak pulse voltage	Test voltage	Insulation resistance		
			W	H	T	F	d	L	Peak to peak	Pulse width	Repetitive frequency	Pulse width (sec) x Frequency(Hz)					
S120033	0.033	120(1/4W)	16.0	16.0	7.0	14.5	0.6±0.05	20.0	650V max.	20msec.max.	120Hz. max.	3max.	700V	Line to Line 750Vdc or 375Vac 50/60Hz 60sec	Line to Line 10,000MQ min. Line to Case 100,000MQ min. (S series: at 500Vdc SB series: at100dc)		
S1201	0.1		120(1/2W)	18.0	22.0	11.0	15.5	0.8±0.07		15.0						50msec.max.	1max.
S1202	0.2	23.0		22.5	11.5	20.0	20msec.max.										
S1203	0.3																
S1205	0.5	120(1/4W)	16.0	18.0	8.0	12.5	-	-		50msec.max.		3max.					
SB120033	0.033		16.0	18.0	8.0	12.5											
SB1201	0.1		19.0	25.0	8.5	15.0											
SB1202	0.2		21.5	28.0	11.0	17.0											
SB1203	0.3		21.5	28.0	11.0	17.0											

*Peak to peak value of pulse condition (max.) is the maximum pulse voltage that is overlapped to line voltage and can apply between terminals of spark quencher.

Operating Temperature: -40~+85°C