



Features

- Uses wiring-easy terminal block.
- General purpose model made with ferrite core.
- Bleeder resistor for electric shock protection.

Applications


- Thyristor-applied systems, Fax machines, Game machines, Various control systems and etc.




Safety Standard		File No.*
UL	:UL-1283	E78644
cUL	:C22.2, NO.8-M1986	E78644
TÜV	:EN60939	R50006831

*File No. may be revised without notice. Please contact us at the time of your request for certifications.


• **Dimensions (5~30A)**

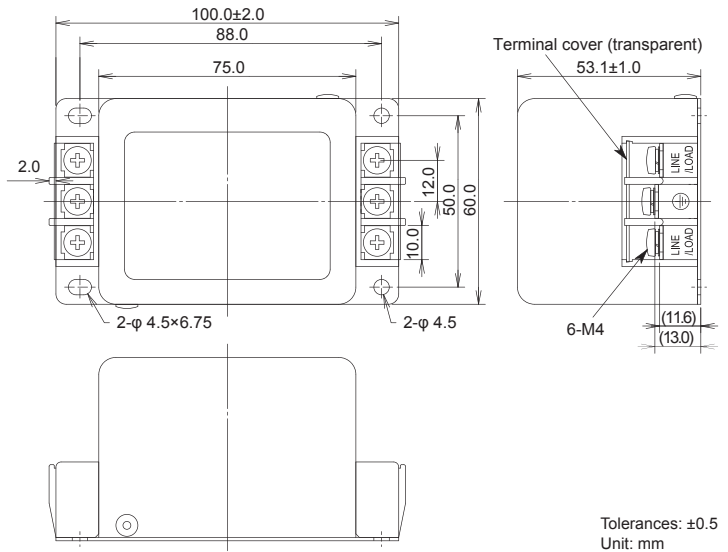

• **Static characteristics (Representative example)**

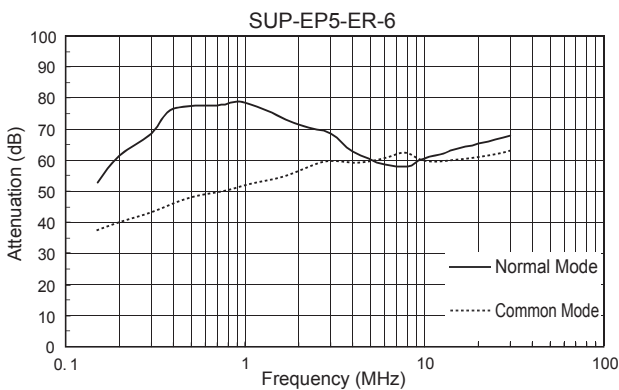

• **Circuit (5 ~ 30A)**

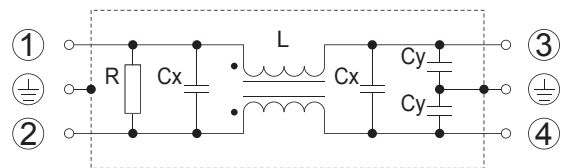

Electrical Specifications

Rated Voltage **250Vac**

Safety Standard	Model Number	Rated Current (A)	Test Voltage	Insulation Resistance	Leakage Current (max.)	Voltage Drop (max.)	Temperature Rise (max.)	Operating Temperature (°C)	Insertion losses		Weight typ.(g)
									Normal Mode (MHz)	Common Mode (MHz)	
	SUP-EP5-ER-6	5	Line to Case 2,500Vac 50/60Hz 60sec	Line to Case 100MΩmin (at 500Vdc)	1mA (at 250Vac 60Hz)	1.0Vac	45K	-25 ~ +50 (100°C with Temp. rise)	0.15 ~ 30	0.3 ~ 20	450
	SUP-EP10-ER-6	10							0.2 ~ 30	0.4 ~ 20	
	SUP-EP15-ER-6	15							0.2 ~ 30	0.7 ~ 20	
	SUP-EP20-ER-6	20							0.3 ~ 30	2.0 ~ 30	
	SUP-EP30-ER-6	30							0.4 ~ 30	6.0 ~ 30	

Guaranteed attenuation is more than 35dB in normal mode and more than 30dB in common mode. Available leakage current 70μA max.(250Vac, 60Hz) type for medical equipments and low leakage current equipments.