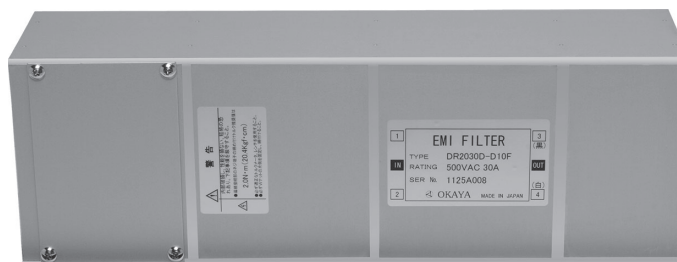
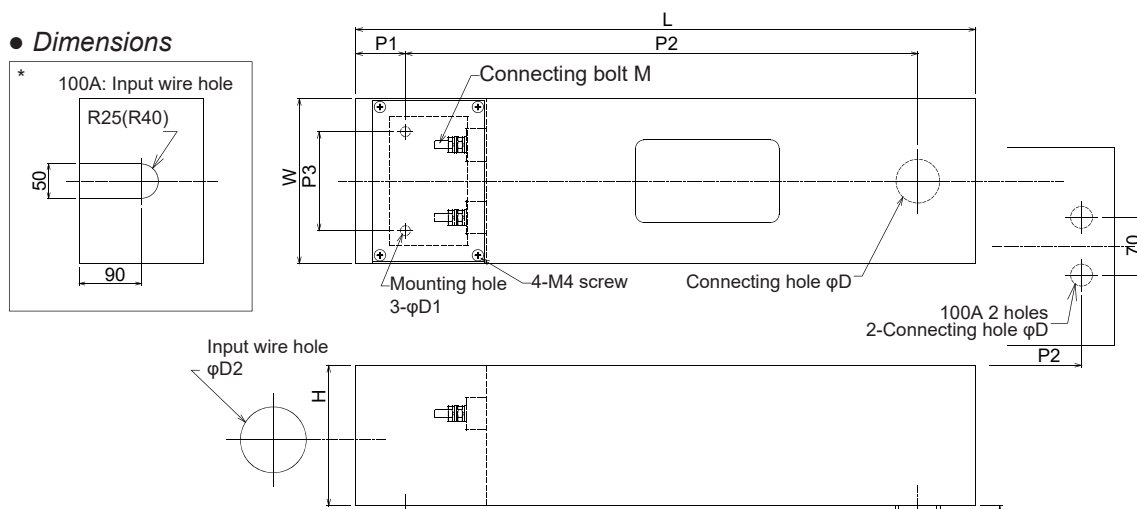


**Features**


- Single-phase power line filter
- Wide-band and high attenuation

Applications

- Anechoic chamber, shielded room

**Dimensions**

Model Number	Dimensions (mm)										
	L	W	H	P1	P2	P3	φD	φD1	φD2	M	S(mm ²)
DR2010D-D10F	340	100	85	30	275	60	27	6	40	M5	12(3.5)
DR2020D-D10F	360	120	85	30	295	80	27	6	40	M5	12(3.5)
DR2030D-D10F	360	120	85	30	295	80	27	6	40	M5	10(5.5)
DR2050D-D10F	440	130	110	30	375	100	27	6	40	M6	8(8.0)
DR2060D-D10F	440	130	110	30	375	100	27	6	40	M6	6(13.5)
DR2100D-D10F	620	240	180	30	550	200	27×2	6	*	M8	(38)
DR2010D-D00F	520	100	85	30	455	60	27	6	40	M5	12(3.5)
DR2020D-D00F	560	120	85	30	495	80	27	6	40	M5	12(3.5)
DR2030D-D00F	560	120	85	30	495	80	27	6	40	M5	10(5.5)
DR2050D-D00F	720	130	110	30	655	100	27	6	40	M6	8(8.0)
DR2060D-D00F	720	130	110	30	655	100	27	6	40	M6	6(13.5)
DR2100D-D00F	1020	240	180	30	950	200	27×2	6	*	M8	(38)



Unit: mm

Electrical SpecificationsRated Voltage **500Vac**

Model Number	Rated Current (A)	Test Voltage	Insulation Resistance	Leakage Current max. at 500Vac 60Hz	Operating Temperature (°C)	Attenuation Characteristics
DR2010D-D10F	10	Line to ground 2,500Vdc 60sec	Line to ground 1,000Vdc 100MΩ min. 60sec	0.43A	-20 ~ +50	150kHz~18GHz 100dB min.
DR2020D-D10F	20					
DR2030D-D10F	30					
DR2050D-D10F	50					
DR2060D-D10F	60					
DR2100D-D10F	100	Line to ground 2,500Vdc 60sec		1.5A		14kHz~18GHz 100dB min.
DR2010D-D00F	10					
DR2020D-D00F	20					
DR2030D-D00F	30					
DR2050D-D00F	50					
DR2060D-D00F	60					
DR2100D-D00F	100					