


特 長

- 主要海外規格を275Vac定格で取得した小型シリーズ
- IEC/EN 60384-14 クラスX2で取得、環境カテゴリー（最高使用温度）は100℃
- 誘電体に特殊技術を用いて、優れた交流特性をもつ高い安全性設計


用 途

- 欧米向け電子機器・電機機器、事務用機器等のノイズ対策用

● 外形寸法

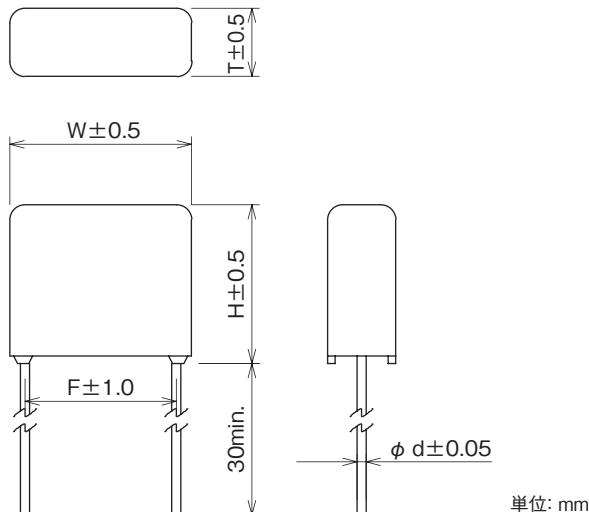


● 回路図



安全規格	File No.
UL :UL-60384-14	E47474
cUL :CSA E60384-14	E47474
CSA :CSA E60384-14, C22.2 No.8	LR37404, LR104926
VDE :IEC/EN 60384-14	094750X
SEMKO :IEC/EN 60384-14	1303400, 916932
NEMKO :IEC/EN 60384-14	P08208949, P10211810
DEMKO :IEC/EN 60384-14	144191-01, 315279-01
FIMKO :IEC/EN 60384-14	FI 24150A2, FI 25644
Electrosuisse:IEC/EN 60384-14	13.0339, 13.0068
ENEC :IEC/EN 60384-14	40028657
KC :K60384-14	SU03007-2001C

ENECマークデザインは右図となります。
デザイン中の10は VDE ID No. を示しています。

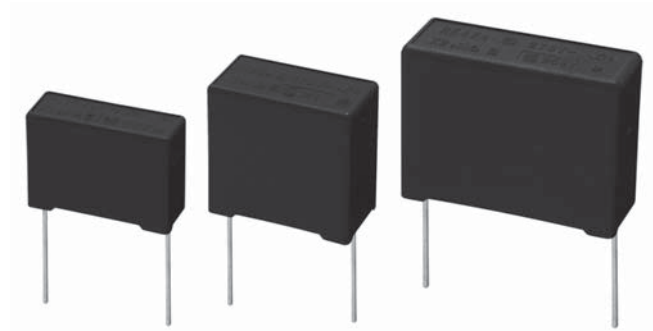

● 型名構成

RE				L
シリーズ名	静電容量	補助記号		
				L リード線端子長 30mm min.

定格電圧 275Vac

安全規格	クラス	型 名	静電容量 μF±10%	外形寸法(mm)					誘電正接	試験電圧	絶縁抵抗			
				W	H	T	F	d						
        	X2	RE103-L	0.01	12.0	10.5	4.5	10.0	0.6	C≤1μF 0.003max. (f=10kHz)	端子間 1,250Vac 50/60Hz 60sec	端子間 C≤0.33μF 15,000MΩmin. C≥0.47μF 5,000Ω・Fmin.			
		RE153-L	0.015											
		RE223-L	0.022											
		RE333-L	0.033											
		RE473-L	0.047	17.0	11.0	5.0	15.0					C>1μF 0.002max. (f=1kHz)	端子・ケース間 2,100Vac 50/60Hz 60sec	端子・ケース間 100,000MΩmin. (at 100Vdc)
		RE683-L	0.068											
		RE104-L	0.1											
		RE154-L	0.15											
		RE224-L	0.22											
		RE334-L	0.33	25.5	17.5	8.0	22.5	0.8						
		RE474-L	0.47											
		RE684-L	0.68											
		RE105-L	1.0											
		RE155-L	1.5	30.5	23.0	12.5	27.5							
		RE225-L	2.2											

使用温度範囲: -55~+100℃