



ノイズサプレッションキャパシタ

PA-L SERIES

NOISE SUPPRESSION CAPACITOR



特長

- 主要海外規格を275Vac定格で取得した小型シリーズ
- IEC/EN 60384-14 クラスX2で取得、環境カテゴリ（最高使用温度）は100℃


用途

- 欧米向け電子機器・電気機器、事務用機器等のノイズ対策用



安全規格		File No.
UL	:UL-60384-14	E47474
cUL	:CSA E60384-14	E47474
CSA	:CSA E60384-14, C22.2 No.8	LR37404, LR104926
VDE	:IEC/EN 60384-14	40018318, 40017808
SEMKO	:IEC/EN 60384-14	9176111, 1111621
NEMKO	:IEC/EN 60384-14	P08209479, P06206040
DEMKO	:IEC/EN 60384-14	315316-01, D-00242
FIMKO	:IEC/EN 60384-14	FI25733, FI27268
Electrosuisse	:IEC/EN 60384-14	12.0939, 12.0937


外形寸法

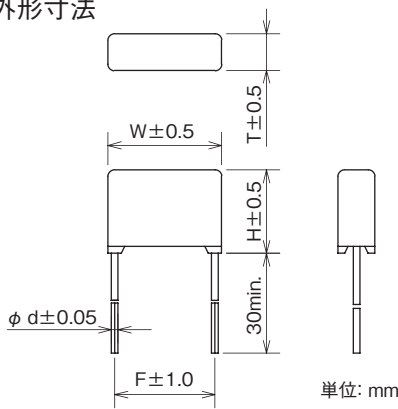

回路図



型名構成

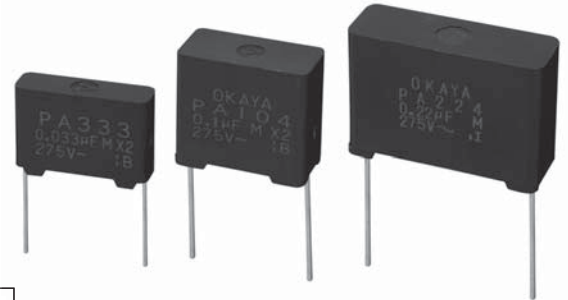

定格電圧 **275Vac**

安全規格	クラス	型名	静電容量 μF±20%	外形寸法(mm)					誘電正接	試験電圧	絶縁抵抗
				W	H	T	F	d			
	X2	PA103-L	0.01	17.0	12.0	5.0	15.0	0.6	0.01max. (at 1kHz)	端子間 1,250Vac 50/60Hz 60sec	端子間 C≤0.33μF 15,000MΩmin. C≥0.47μF 5,000Ω·Fmin
		PA123-L	0.012								
		PA153-L	0.015								
		PA183-L	0.018								
		PA223-L	0.022								
		PA273-L	0.027								
		PA333-L	0.033								
		PA393-L	0.039								
		PA473-L	0.047								
		PA563-L	0.056								
		PA683-L	0.068								
		PA823-L	0.082								
		PA104-L	0.1	25.0	16.0	6.5	22.5	0.8			
		PA124-L	0.12								
		PA154-L	0.15								
		PA184-L	0.18								
		PA224-L	0.22								
		PA274-L	0.27								
		PA334-L	0.33	30.0	22.0	11.0	27.5	1.0			
		PA394-L	0.39								
		PA474-L	0.47								
		PA564-L	0.56								
PA684-L	0.68	30.5	28.0	16.0	37.5	1.0					
PA824-L	0.82										
PA105-L	1.0										
PA125-L	1.2	41.0	32.5	17.5	37.5	1.0					
PA155-L	1.5										
PA185-L	1.8										
PA225-L	2.2										

使用温度範囲: -40~+100℃